



Item # _____

Job _____



Wire Shelving

SUPER ERECTA SHELF® WIRE SHELVING

- **Unique Design:** The open wire design of these shelves minimizes dust accumulation and allows free circulation of air, greater visibility of stored items and greater light penetration.
 - **Durable Construction:** Super Erecta shelves and posts are constructed of heavy-gauge carbon steel or Type 304 stainless steel.
 - **Choice of Finishes:** Super Erecta Brite™ and chrome-plated for dry storage; Metroseal 3™ with Microban® antimicrobial product protection and stainless steel for corrosive environments; and attractive epoxy color options for merchandising applications.
 - **Versatile:** Super Erecta Shelf® wire shelving can adapt to your changing needs. By using various accessories, hundreds of shelving configurations become possible.
 - **Fast, Secure Assembly:** SiteSelect™ Posts have a double groove visual guide feature every 8" (203mm), circular grooves at 1" (25mm) increments, and are numbered at 2" (50mm) intervals. A patented, tapered split sleeve snaps together around each post. Tapered openings in the shelf corners slide over the tapered split sleeves providing a positive lock. Shelf is assembled in minutes without the use of any special tools.
 - **Adjustability:** Shelves can be adjusted at 1" (25mm) intervals along the entire length of the post.
 - **Shelf Ribs:** Run front to back, allowing you to slide items on and off shelves smoothly.
 - **Shelf Accessibility:** Shelves can be loaded/unloaded easily from all sides. This open construction allows maximum use of storage cube.
 - **Adjustable Feet:** Bolt levelers compensate for surface irregularities.
- Note:** Stainless stationary posts are equipped with stainless steel leveling feet.



*MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban Products Company, Huntersville, NC.




InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



10-01



Wire Shelves

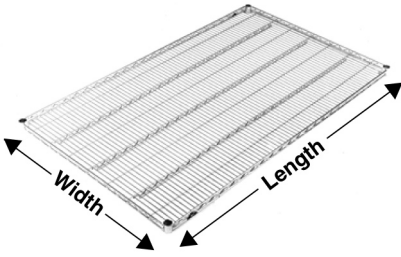

Split Sleeve



Aluminum Split Sleeve

- **Metroseal 3:** Metro's proprietary epoxy coating contains Microban® antimicrobial product protection. Microban antimicrobial protects the epoxy coating from bacteria, mold, mildew, and fungus that cause odors, stains, and product degradation.
- See spec sheet 10.14 for epoxy color options.
- Plastic split sleeves are included with each shelf
Replacements are available: Cat. No. 9985 (bag of 4)
- Aluminum split sleeves are recommended for abusive mobile applications and autoclave applications.
Cat. No. 9986Z (bag of 4 with zinc C-rings)
Cat. No. 9986S (bag of 4 with stainless steel C-rings)
- Load capacity (evenly distributed) per shelf
Depths: 14" to 24" (355 to 610mm)
800 lbs. (363kg) for lengths of 18" to 48" (457 to 1219mm)
600 lbs. (272kg) for lengths of 54" (1370mm) or longer
- Load capacity (evenly distributed) per unit.
Stationary shelving units have a maximum load capacity (evenly distributed) of 2,000 lbs. (907kg)
Mobile units have a maximum capacity of three times the caster load rating up to but not exceeding 1,000 lbs. (453kg) total. Consult the Metro catalog for caster load ratings
- SUPER ERECTA SHELF meets Government Specifications MIL-S-40144E.

| Model No. Super Erecta Brite | Model No. Chrome | Model No. Metroseal 3 with Microban® | Model No. Stainless | Nominal Width/Length (in.) (mm) | Approx. Pkd. Wt. (lbs.) (kg) |
|---------------------------------|---------------------|-----------------------------------------|------------------------|------------------------------------|------------------------------------|
| 1424BR | 1424NC | 1424NK3 | 1424NS | 14x24 355x610 | 6 2.7 |
| 1430 BR | 1430NC | 1430NK3 | 1430NS | 14x30 355x760 | 7 3.2 |
| 1436BR | 1436NC | 1436NK3 | 1436NS | 14x36 355x914 | 8 3.6 |
| 1442BR | 1442NC | 1442NK3 | 1442NS | 14x42 355x1066 | 9 1/2 4.3 |
| 1448BR | 1448NC | 1448NK3 | 1448NS | 14x48 355x1219 | 10 1/2 4.7 |
| 1460BR | 1460NC | 1460NK3 | 1460NS | 14x60 355x1524 | 14 6.3 |
| 1472BR | 1472NC | 1472NK3 | 1472NS | 14x72 355x1829 | 17 7.7 |
| 1824BR | 1824NC | 1824NK3 | 1824NS | 18x24 457x610 | 7 3.2 |
| 1830BR | 1830NC | 1830NK3 | 1830NS | 18x30 457x760 | 8 3.6 |
| 1836BR | 1836NC | 1836NK3 | 1836NS | 18x36 457x914 | 9 1/2 4.3 |
| 1842BR | 1842NC | 1842NK3 | 1842NS | 18x42 457x1066 | 11 5.0 |
| 1848BR | 1848NC | 1848NK3 | 1848NS | 18x48 457x1219 | 12 5.4 |
| 1854BR | 1854NC | 1854NK3 | 1854NS | 18x54 457x1370 | 14 1/2 6.6 |
| 1860BR | 1860NC | 1860NK3 | 1860NS | 18x60 457x1524 | 17 7.7 |
| 1872BR | 1872NC | 1872NK3 | 1872NS | 18x72 457x1829 | 20 9.1 |
| 2124BR | 2124NC | 2124NK3 | 2124NS | 21x24 530x610 | 8 3.6 |
| 2130BR | 2130NC | 2130NK3 | 2130NS | 21x30 530x760 | 9 4.1 |
| 2136BR | 2136NC | 2136NK3 | 2136NS | 21x36 530x914 | 11 5.0 |
| 2142BR | 2142NC | 2142NK3 | 2142NS | 21x42 530x1066 | 12 5.4 |
| 2148BR | 2148NC | 2148NK3 | 2148NS | 21x48 530x1219 | 14 6.4 |
| 2154BR | 2154NC | 2154NK3 | 2154NS | 21x54 530x1370 | 16 7.3 |
| 2160BR | 2160NC | 2160NK3 | 2160NS | 21x60 530x1524 | 18 8.2 |
| 2172BR | 2172NC | 2172NK3 | 2172NS | 21x72 530x1829 | 24 10.9 |
| 2424BR | 2424NC | 2424NK3 | 2424NS | 24x24 610x610 | 9 4.1 |
| 2430BR | 2430NC | 2430NK3 | 2430NS | 24x30 610x760 | 11 5.0 |
| 2436BR | 2436NC | 2436NK3 | 2436NS | 24x36 610x914 | 13 5.9 |
| 2442BR | 2442NC | 2442NK3 | 2442NS | 24x42 610x1066 | 15 6.8 |
| 2448BR | 2448NC | 2448NK3 | 2448NS | 24x48 610x1219 | 16 7.3 |
| 2454BR | 2454NC | 2454NK3 | 2454NS | 24x54 610x1370 | 19 8.6 |
| 2460BR | 2460NC | 2460NK3 | 2460NS | 24x60 610x1524 | 21 9.5 |
| 2472BR | 2472NC | 2472NK3 | 2472NS | 24x72 610x1829 | 26 11.8 |

Note: 14" (355mm) deep units.
Free-standing units: Foot plates should be used and secured to the floor.
Mobile units: maximum allowable post height is 54" (1370mm).

SiteSelect™ Posts

Stationary Posts

Stationary posts are equipped with a leveling bolt to account for uneven floors.

- Height includes leveling bolt (completely tightened) and post cap Leveling bolt can be adjusted 1/2" (13mm).
- Foot plates may be ordered separately and installed in place of leveling foot.
- Replacement leveling bolts
Zinc Cat. No. RPF04-004 Stainless Steel Cat. No. RPF04-004C
- Replacement post cap for standard posts
Black Cat. No. RPC06-035



SiteSelect Posts feature double grooves every 8" (203mm) to aid assembly.

| Model No. Chrome | Model No. Metroseal 3 with Microban | Model No. Stainless Steel | Height | | Approx. Pkd. Wt. | |
|---------------------|-------------------------------------------|------------------------------|---------------------------------|------|-------------------------------|------|
| | | | (in.) | (mm) | (lbs.) | (kg) |
| 7P | | | 7 ³ / ₈ | 187 | 1/2 | 0.3 |
| 13P | 13PK3 | 13PS | 14 ³ / ₈ | 365 | 1 | 0.5 |
| 27P | | 27PS | 28 ³ / ₈ | 720 | 1 ³ / ₄ | 0.75 |
| 33P | 33PK3 | 33PS | 34 ³ / ₈ | 873 | 2 | 0.9 |
| 54P | 54PK3 | 54PS | 54 ⁷ / ₁₆ | 1382 | 3 | 1.4 |
| 63P | 63PK3 | 63PS | 62 ⁷ / ₁₆ | 1585 | 3 ¹ / ₂ | 1.6 |
| 74P | 74PK3 | 74PS | 74 ¹ / ₂ | 1892 | 4 | 1.8 |
| 86P | 86PK3 | 86PS | 86 ¹ / ₂ | 2197 | 5 | 2.3 |
| *96P | | | 96 ¹ / ₂ | 2450 | 5 ¹ / ₂ | 2.5 |

*96P should not be used on units less than 24" (610mm) deep. Consult Metro Engineering for alternate recommendations.

Mobile Posts (For use with Stem Casters)

- Height includes post cap.

| Model No. Chrome | Model No. Metroseal 3 with Microban | Model No. Stainless Steel | Height | | Approx. Pkd. Wt. | |
|---------------------|-------------------------------------------|------------------------------|----------------------------------|------|-------------------------------|------|
| | | | (in.) | (mm) | (lbs.) | (kg) |
| 27UP | | 27UPS | 27 ³ / ₄ | 704 | 1 ³ / ₄ | 0.75 |
| 33UP | 33UPK3 | 33UPS | 33 ³ / ₄ | 857 | 2 | 0.9 |
| 54UP | 54UPK3 | 54UPS | 53 ¹³ / ₁₆ | 1366 | 3 | 1.4 |
| 63UP | 63UPK3 | 63UPS | 61 ¹³ / ₁₆ | 1570 | 3 ¹ / ₂ | 1.6 |
| | 70UPK3 | | 69 ³ / ₄ | 1771 | 3 ³ / ₄ | 1.7 |
| 74UP | 74UPK3 | 74UPS | 73 ⁷ / ₈ | 1876 | 4 | 1.8 |
| 86UP | 86UPK3 | 86UPS | 85 ⁷ / ₈ | 2181 | 4 ¹ / ₂ | 2.0 |

Staked Posts (For use with Truck Dollies)

- Each post connects to the truck dolly through the stem receptacle. The stem receptacle is staked into the bottom of the post to ensure a durable connection in abusive mobile applications.
- Each includes a leveling/connecting bolt.

| Model No. Chrome | Model No. Stainless Steel | Height | | Approx. Pkd. Wt. | |
|---------------------|------------------------------|---------------------------------|------|-------------------------------|------|
| | | (in.) | (mm) | (lbs.) | (kg) |
| 54P-STKD | 54PS-STKD | 54 ⁷ / ₁₆ | 1382 | 3 | 1.4 |
| 63P-STKD | 63PS-STKD | 62 ⁷ / ₁₆ | 1585 | 3 ¹ / ₂ | 1.6 |
| 74P-STKD | 74PS-STKD | 74 ¹ / ₂ | 1892 | 4 | 1.8 |

Swedged Posts (For use with Stem Casters in Cart Wash Applications)

- Each post has an aluminum cap swedged into the top of the post.

| Model No. Stainless Steel | Height | | Approx. Pkd. Wt. | |
|------------------------------|----------------------------------|------|-------------------------------|------|
| | (in.) | (mm) | (lbs.) | (kg) |
| 33UPS-SW | 33 ³ / ₄ | 857 | 2 | 0.9 |
| 54UPS-SW | 53 ¹³ / ₁₆ | 1366 | 3 | 1.4 |
| 63UPS-SW | 61 ¹³ / ₁₆ | 1570 | 3 ¹ / ₂ | 1.6 |

Special Length Posts

Special length cut posts are available. Consult your Metro representative for more information.



SUPER ERECTA SHELF® WIRE SHELVING

Super Wide Shelving

- **High-density Storage:** Super Wide™ shelves have a greater storage area for holding large quantities of supplies, especially large, bulky objects, providing maximum storage in minimum space.
- **Load Capacity** (evenly distributed) per shelf:
Depths: 30" and 36" (760 and 914mm)
600 lbs. (272kg) for lengths 48" (1219mm) or shorter.
400 lbs. (181kg) for lengths 54" (1370mm) or longer.



| Model No. Chrome | Model No. Metroseal 3 with Microban | Model No. Stainless Steel | Nominal Width/Length | | Approx. Pkd. Wt. | |
|---------------------|-------------------------------------------|------------------------------|----------------------|----------|---------------------|------|
| | | | (in.) | (mm) | (lbs.) | (kg) |
| 3036NC | 3036NK3 | 3036NS | 30x36 | 760x914 | 15 | 6.8 |
| 3048NC | 3048NK3 | 3048NS | 30x48 | 760x1219 | 21 | 9.5 |
| 3060NC | 3060NK3 | 3060NS | 30x60 | 760x1524 | 26 ^{1/2} | 11.8 |
| 3072NC | 3072NK3 | 3072NS | 30x72 | 760x1829 | 31 | 14.0 |
| 3636NC | 3636NK3 | 3636NS | 36x36 | 910x914 | 18 | 8.2 |
| 3648NC | 3648NK3 | 3648NS | 36x48 | 910x1219 | 23 | 10.4 |
| 3660NC | 3660NK3 | 3660NS | 36x60 | 910x1524 | 29 | 13.1 |
| 3672NC | 3672NK3 | 3672NS | 36x72 | 910x1829 | 34 ^{1/2} | 15.4 |

Foot Plates

- Use to bolt units to the floor, or when a broader, more stable foot is desired. Foot plates also help to protect floors by distributing the point load of the shelving unit across a larger contact point.
- Foot plates (completely tightened) add 1/8" (3mm) to the specified heights of each stationary post on the table.
Zinc Cat. No. 9993Z
Stainless Steel Cat. No. 9993S



"S" Hook

- Used to add on shelving units with only two posts required. Order two per shelf level.
Cat. No. 9995Z



All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation
North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741
Fax: 570-825-2852

L02-006
Printed in U.S.A. Rev. 11/08
Information and specifications are subject to change
without notice. Please confirm at time of order.
Copyright © 2008 InterMetro Industries Corp.

For Product Information:
U.S. and Canada: 1.800.433.2232

Latin America: 1.561.333.3824
Europe: +31.76.587.7550

Asia/Pacific: +65.6567.8003
Middle East/Africa: +971.4.811.8286