


Deluxe Installation Kits & Hose Assemblies with SnapFast™ QD & Single SwivelMAX™

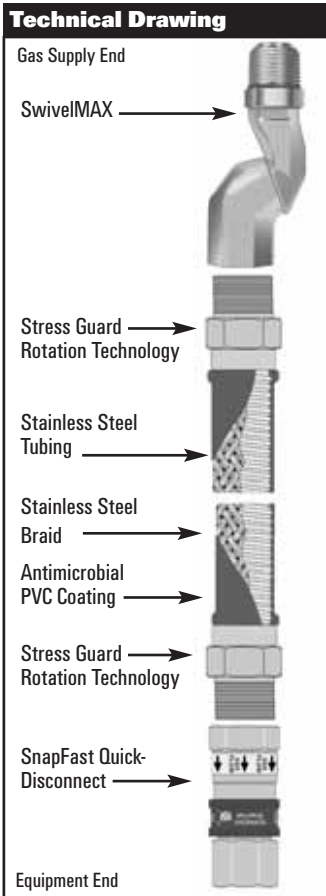

Product Part Numbers - Order Using Part Numbers Listed Below

Configuration	Inside Dia.	LENGTH				
		24"	36"	48"	60"	72"
DELUXE KIT *		1650KITS24	1650KITS36	1650KITS48	1650KITS60	1650KITS72
BASIC KIT **	1/2"	1650BPQSR24	1650BPQSR36	1650BPQSR48	1650BPQSR60	1650BPQSR72
HOSE ASSEMBLY ♦		1650BPQS24	1650BPQS36	1650BPQS48	1650BPQS60	1650BPQS72
DELUXE KIT *		1675KITS24	1675KITS36	1675KITS48	1675KITS60	1675KITS72
BASIC KIT	3/4"	1675BPQSR24	1675BPQSR36	1675BPQSR48	1675BPQSR60	1675BPQSR72
HOSE ASSEMBLY ♦		1675BPQS24	1675BPQS36	1675BPQS48	1675BPQS60	1675BPQS72
DELUXE KIT *		16100KITS24	16100KITS36	16100KITS48	16100KITS60	16100KITS72
BASIC KIT **	1"	16100BPQSR24	16100BPQSR36	16100BPQSR48	16100BPQSR60	16100BPQSR72
HOSE ASSEMBLY ♦		16100BPQS24	16100BPQS36	16100BPQS48	16100BPQS60	16100BPQS72
DELUXE KIT *		16125KITS24	16125KITS36	16125KITS48	16125KITS60	16125KITS72
BASIC KIT **	1-1/4"	16125BPQSR24	16125BPQSR36	16125BPQSR48	16125BPQSR60	16125BPQSR72
HOSE ASSEMBLY ♦		16125BPQS24	16125BPQS36	16125BPQS48	16125BPQS60	16125BPQS72

BTU Flow Capacity (Flow rating BTU 0.64 SP. GR. @ 0.5 inch WC pressure drop)

Part #	Inside Dia.	LENGTH					
		12"	24"	36"	48"	60"	72"
1650BPQS	1/2"	92,000	81,000	72,000	63,000	56,000	51,000
1675BPQS	3/4"	242,000	216,000	203,000	167,000	147,000	130,000
16100BPQS	1"	396,000	385,000	353,000	310,000	274,000	260,000
16125BPQS	1-1/4"	556,000	533,000	491,000	482,000	463,000	460,000



Approvals & Certifications

NSF NSF International Criteria C-2, Special Equipment and/or Devices

Component

UL UL 567, Pipe Connectors for Flammable and Combustible Liquids and LP-Gas

SP ANSI Z21.69 / CSA 6.16 - Connectors for Moveable Gas Appliances

C US ANSI Z21.41 / CSA 6.9 - Quick-Disconnect Devices For Use With Gas Fuel

Meets requirements of ANSI Z223.1 / NFPA 54 - National Fuel Gas Code

Refer to catalog page 23 for additional approvals & certifications and Dormont gas connector limited lifetime warranty

SwivelMAX and SnapFast are not for use in temperatures less than 32°F

ISO 9001:2000 REGISTERED

Features & Specifications

THE DORMONT BLUE HOSE:

- Tubing Annealed, 304 stainless steel (ASTM A240)
- Braiding Multi-strand, 304 stainless steel wire
- Coating Antimicrobial (patent #6,742,815) PVC, melts at 350°F, coating will not hold a flame; blue color indicates braided connector
- End Fittings Carbon steel; zinc and yellow dichromate coating
- Stress Guard 360° rotation of end fittings at both ends (patent pending)

THE SNAPFAST ONE-HANDED QUICK-DISCONNECT - QD:

- Quick-Disconnect Brass body, carbon steel threaded end fittings, and aluminum collar
- Thermal Shut-off Polymer insert in QD melts when internal temperatures exceed 350° F to shut off gas flow.

SWIVELMAX: Aluminum body, brass threaded end fittings

- Movement 360° multi-plane spherical rotation
- Patent # US patent 5,178,422 and 4,615,547; Canada patent 2,079,825

* DELUXE KITS INCLUDE:

- Elbow Malleable iron - 1 included
- Restraining Cable PVC coated, carbon steel, multi-strand cable
- Valve 100% full port, brass gas ball valve

** BASIC KITS INCLUDE: .The Dormont Blue Hose and restraining cable and hardware required for caster-mounted installations

♦ HOSE ASSEMBLIES

INCLUDE: Hose assembly and (1) elbow

1-800-DORMONT

Dormont

www.dormont.com

DEMAND THE DIFFERENCE!