

## Deluxe Installation Kits & Hose Assemblies with SnapFast™ QD & Double SwivelMAX™


### Product Part Numbers - Order Using Part Numbers Listed Below

Configuration	Inside Dia.	LENGTH				
		24"	36"	48"	60"	72"
DELUXE KIT *		1650KIT2S24	1650KIT2S36	1650KIT2S48	1650KIT2S60	1650KIT2S72
BASIC KIT **	1/2"	1650BPQ2SR24	1650BPQ2SR36	1650BPQ2SR48	1650BPQ2SR60	1650BPQ2SR72
HOSE ASSEMBLY		1650BPQ2S24	1650BPQ2S36	1650BPQ2S48	1650BPQ2S60	1650BPQ2S72
DELUXE KIT *		1675KIT2S24	1675KIT2S36	1675KIT2S48	1675KIT2S60	1675KIT2S72
BASIC KIT **	3/4"	1675BPQ2SR24	1675BPQ2SR36	1675BPQ2SR48	1675BPQ2SR60	1675BPQ2SR72
HOSE ASSEMBLY		1675BPQ2S24	1675BPQ2S36	1675BPQ2S48	1675BPQ2S60	1675BPQ2S72
DELUXE KIT *		16100KIT2S24	16100KIT2S36	16100KIT2S48	16100KIT2S60	16100KIT2S72
BASIC KIT **	1"	16100BPQ2SR24	16100BPQ2SR36	16100BPQ2SR48	16100BPQ2SR60	16100BPQ2SR72
HOSE ASSEMBLY		16100BPQ2S24	16100BPQ2S36	16100BPQ2S48	16100BPQ2S60	16100BPQ2S72
DELUXE KIT *		16125KIT2S24	16125KIT2S36	16125KIT2S48	16125KIT2S60	16125KIT2S72
BASIC KIT **	1-1/4"	16125BPQ2SR24	16125BPQ2SR36	16125BPQ2SR48	16125BPQ2SR60	16125BPQ2SR72
HOSE ASSEMBLY		16125BPQ2S24	16125BPQ2S36	16125BPQ2S48	16125BPQ2S60	16125BPQ2S72

### BTU Flow Capacity (Flow rating BTU 0.64 SP. GR. @ 0.5 inch WC pressure drop)

Part #	Inside Dia.	LENGTH					
		12"	24"	36"	48"	60"	72"
1650BPQ2S	1/2"	88,000	77,000	69,000	60,000	54,000	48,000
1675BPQ2S	3/4"	230,000	205,000	193,000	160,000	140,000	124,000
16100BPQ2S	1"	377,000	366,000	336,000	295,000	261,000	247,000
16125BPQ2S	1-1/4"	482,000	472,000	461,000	449,000	441,000	440,000

### Technical Drawing

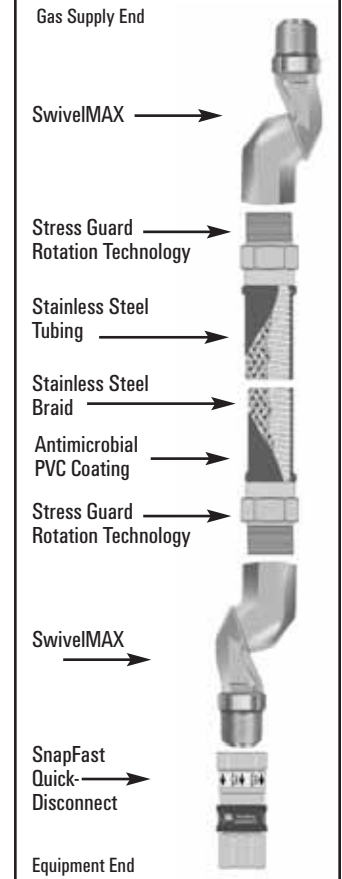

### Approvals & Certifications

- NSF International Criteria C-2, Special Equipment and/or Devices  
\*Component\*
- UL 567, Pipe Connectors for Flammable and Combustible Liquids and LP-Gas
- ANSI Z21.69 / CSA 6.16 - Connectors for Moveable Gas Appliances
- ANSI Z21.41 / CSA 6.9 - Quick-Disconnect Devices For Use With Gas Fuel
- Meets requirements of ANSI Z223.1 / NFPA 54 - National Fuel Gas Code
- Refer to catalog page 23 for additional approvals & certifications and Dormont gas connector limited lifetime warranty
- SwivelMAX is not for use in temperatures less than 32°F



### Features & Specifications

- THE DORMONT BLUE HOSE:**
  - Tubing ..... Annealed, 304 stainless steel (ASTM A240)
  - Braiding ..... Multi-strand, 304 stainless steel wire
  - Coating ..... Antimicrobial (patent #6,742,815) PVC, melts at 350°F, coating will not hold a flame; blue color indicates braided connector
  - End Fittings ..... Carbon steel; zinc and yellow dichromate coating
  - Stress Guard ..... 360° rotation of end fittings at both ends before and after installation (patent pending)
- THE SNAPFAST ONE-HANDED QUICK-DISCONNECT - QD:**
  - Quick-Disconnect ..... Brass body, carbon steel threaded end fittings, and aluminum collar
  - Thermal Shut-off ..... Polymer insert in QD melts when internal temperatures exceed 350° F to shut off gas flow.
- SWIVEL MAX:** ..... Aluminum body, brass threaded end fittings
  - Movement ..... 360° multi-plane spherical rotation
  - Patent # ..... US patent 5,178,422 and 4,615,547; Canada patent 2,079,825
- \* **DELUXE KITS INCLUDE:**
  - Restraining Cable ..... PVC coated, carbon steel, multi-strand cable
  - Valve ..... 100% full port, brass gas ball valve
- \*\* **BASIC KITS INCLUDE:** .. The Dormont Blue Hose and restraining cable and hardware required for caster-mounted installations



DEMAND THE DIFFERENCE!

1-800-DORMONT  
**Dormont**  
www.dormont.com