

**Deluxe Installation Kits & Hose Assemblies with SnapFast™ QD**




**Product Part Numbers - Order Using Part Numbers Listed Below**

Configuration	Inside Dia.	LENGTH				
		24"	36"	48"	60"	72"
DELUXE KIT *		1650KIT24	1650KIT36	1650KIT48	1650KIT60	1650KIT72
BASIC KIT **	1/2"	1650BPQR24	1650BPQR36	1650BPQR48	1650BPQR60	1650BPQR72
HOSE ASSEMBLY		1650BPQ24	1650BPQ36	1650BPQ48	1650BPQ60	1650BPQ72
DELUXE KIT *		1675KIT24	1675KIT36	1675KIT48	1675KIT60	1675KIT72
BASIC KIT **	3/4"	1675BPQR24	1675BPQR36	1675BPQR48	1675BPQR60	1675BPQR72
HOSE ASSEMBLY		1675BPQ24	1675BPQ36	1675BPQ48	1675BPQ60	1675BPQ72
DELUXE KIT *		16100KIT24	16100KIT36	16100KIT48	16100KIT60	16100KIT72
BASIC KIT **	1"	16100BPQR24	16100BPQR36	16100BPQR48	16100BPQR60	16100BPQR72
HOSE ASSEMBLY		16100BPQ24	16100BPQ36	16100BPQ48	16100BPQ60	16100BPQ72
DELUXE KIT *		16125KIT24	16125KIT36	16125KIT48	16125KIT60	16125KIT72
BASIC KIT **	1-1/4"	16125BPQR24	16125BPQR36	16125BPQR48	16125BPQR60	16125BPQR72
HOSE ASSEMBLY		16125BPQ24	16125BPQ36	16125BPQ48	16125BPQ60	16125BPQ72

**BTU Flow Capacity (Flow rating BTU 0.64 SP. GR. @ 0.5 inch WC pressure drop)**

Part #	Inside Dia.	LENGTH					
		12"	24"	36"	48"	60"	72"
1650BPQ	1/2"	98,000	87,000	77,000	68,000	60,000	55,000
1675BPQ	3/4"	260,000	232,000	218,000	180,000	158,000	139,000
16100BPQ	1"	425,000	414,000	379,000	334,000	294,000	279,000
16125BPQ	1-1/4"	783,000	699,000	615,000	541,000	476,000	419,000


**Approvals & Certifications**

-  NSF International Criteria C-2, Special Equipment and/or Devices
- \*Component\*
-  ANSI Z21.69 / CSA 6.16 - Connectors for Moveable Gas Appliances
-  ANSI Z21.41 / CSA 6.9 - Quick-Disconnect Devices For Use With Gas Fuel
- Meets requirements of ANSI Z223.1 / NFPA 54 - National Fuel Gas Code
- Refer to catalog page 23 for additional approvals & certifications and Dormont gas connector limited lifetime warranty
- SnapFast is not for use in temperatures less than 32°F



**Features & Specifications**

- THE DORMONT BLUE HOSE:**
- Tubing ..... Annealed, 304 stainless steel (ASTM A240)
- Braiding ..... Multi-strand, 304 stainless steel wire
- Coating ..... Antimicrobial (patent #6,742,815) PVC, melts at 350°F, coating will not hold a flame; blue color indicates braided connector
- End Fittings ..... Carbon steel; zinc and yellow dichromate coating
- Stress Guard ..... 360° rotation of end fittings at both ends before and after installation (patent pending)
- THE SNAPFAST ONE-HANDED QUICK-DISCONNECT - QD:**
- Quick-Disconnect ..... Brass body, carbon steel threaded end fittings, and aluminum collar
- Thermal Shut-off ..... Polymer insert in QD melts when internal temperatures exceed 350° F, to shut off gas flow
- \* DELUXE KITS INCLUDE:**
- Elbow ..... Malleable iron - 2 included
- Restraining Cable ..... PVC coated, carbon steel, multi-strand cable
- Valve ..... 100% full port, brass gas ball valve
- \*\* BASIC KITS INCLUDE:** ..... The Dormont Blue Hose and restraining cable and hardware required for caster-mounted installations

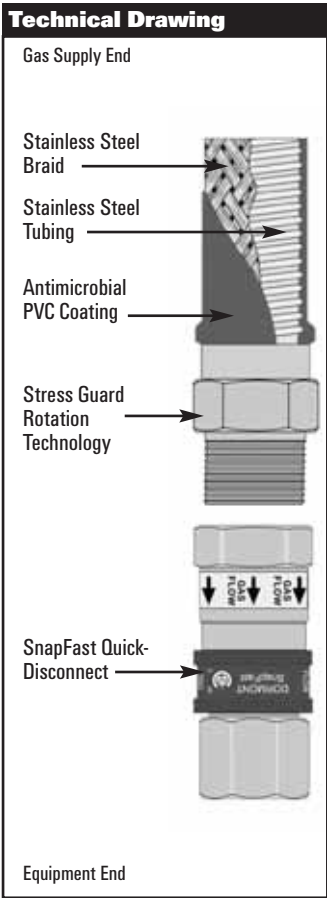

**DEMAND THE DIFFERENCE!**

**1-800-DORMONT**  
**DORMONT**  
 www.dormont.com