

QUEEN MARY RACKS 271 SERIES

FEATURES AND BENEFITS:

- Durable Queen Mary rack ideal for transporting plated banquet meals and returning soiled dishware to ware washing area.
- All riveted framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Shelves have raised "marine" edges; prevents tray slide and retains spillage.
- Two models available:
5 shelves with 11" clearance - Model 271-51-5927
6 shelves with 8" clearance - Model 271-61-5927
- Side mounted push handles for ease of transporting.
- Standard perimeter bumper protects surfaces.
- Heavy duty 8" polyurethane casters, two swivel with brakes make maneuvering easy.




271-61-5927



ACCESSORIES and OPTIONS (Available at extra cost):

- Stainless Steel Shelves

271 Series

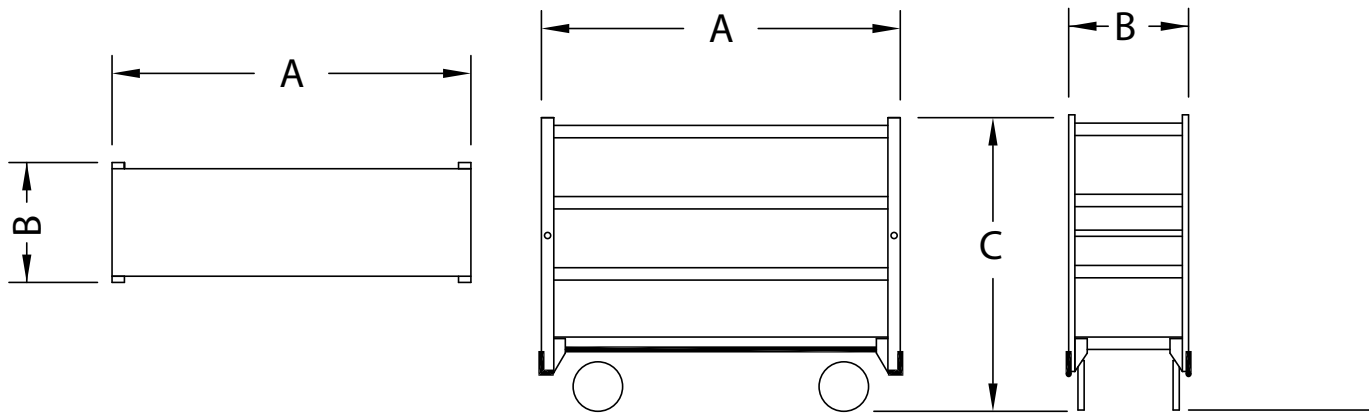

CRES COR MODEL NO.	NO. OF SHELVES		DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
			WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	*HEIGHT		
271-51-5927	5	IN	62-1/4	29	62-11/16	55-1/4	25	11	LBS	156
		MM	1585	740	1595	1405	635	280	KG	71
271-61-5927	6	IN	62-1/4	29	62-11/16	55-1/4	25	8	LBS	156
		MM	1585	740	1595	1405	635	205	KG	71

NOTES: 1. For oval tray sizes: 20-3/4" x 25-1/2", 22-3/4" x 27-5/8" and 23-1/2" x 29". Two trays per shelf.
 2. *Inside height dimension is between shelves.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

RACK:

- Posts: Extruded channels, 1 x 2 x .125.
- Shelves: Formed one piece .063 aluminum with 1/4" marine edges on the two 62" sides; reinforced with .063 aluminum channels.
- Optional stainless steel shelves are 16 ga. type 304.
 271-52-5927: Five shelves spaced with 11" clearance.
 271-62-5927: Six shelves spaced with 8" clearance.
- Shelf corners and bottom gussets: .100 aluminum riveted to posts and shelves.
- Push handles (2): 1" dia. aluminum tubing, gray plastic coated.
- Bolsters: Formed .190 aluminum; welded to posts, casters attached.
- Casters: 8" dia., polyurethane tires, 2" wide, load cap. 900 lbs. each, temp. range -30°/+180°F. Bearings are sealed and permanently lubricated. Two swivel casters equipped with brakes and two rigid casters.
- Bumper: 1" wide gray rubber, perimeter type.

SHORT FORM SPECIFICATIONS

Cres Cor Queen Mary Rack Model 271-____-5927.
 Extruded aluminum construction reinforced with riveted gussets. (____) aluminum (or) stainless steel shelves with 1/4" marine edges with (____) clearance. Push handle on each end. 8" polyurethane casters, 2 swivel, 2 rigid, permanently lubricated, sealed ball bearings. Load capacity 900 lbs. each, temperature -30° to +180°F. 2 Year Parts / 1 Year Labor Warranty. NSF Listed. NSF Listed.



5925 Heisley Road • Mentor, OH 44060-1833
 Phone: 877/CRESCOR • Fax: 440/350-7267
 www.crescor.com

© Crescent Metal Products, Inc. 2011 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Litho in U.S.A.